



شركة المصنع السعودي لأجهزة الإطفاء
SAUDI FACTORY FOR FIRE EQUIPMENT Co.

Empowering
a **Safer Future** for
the Kingdom



Fire Cabinets SF600 Series

HORIZONTAL - DOUBLE COMPARTMENT
ONE FOR SEMI-RIGID FIRE HOSE REEL AND
ONE FOR OPTIONAL FIRE EXTINGUISHER

- ❖ Recessed type cabinets
- ❖ Semi-Recessed type cabinets
- ❖ Surface type cabinets
- ❖ Self Stand type cabinets

Quality Approvals for Various Products and Services

VER: 00-12/25

Fire Cabinets

Model: SF 600 Series



- ❖ SFFECO Cabinets are manufactured from Mild Steel or Stainless Steel material with a thickness of 0.9mm to 2.0mm which depends on usage or customer request.
- ❖ Backbox, Door and Frame can be of different thickness and material.
- ❖ The cabinets are available with all around folded edges without any sharp edges.
- ❖ Optional Hairline or Mirror finish Stainless Steel cabinets are also available.
- ❖ Cabinets are painted with Powder Coated for elegant finish and protection from rust.
- ❖ Operation Instructions are silk screen printed in Arabic and English languages inside the cabinet.
- ❖ Hose Reels in cabinets are fully equipped with landing valves and nozzles.
- ❖ Cabinets are available in different size and design to meet architectural requirements.



Model: SF600



Model: SF600S


Item	Specification
Body Material (SF600)	Mild Steel
Body Material (SF600S)	Stainless Steel #304
Thickness	0.9mm / 1mm / 1.2 mm / 1.5 mm / 2.0mm
Door Type	Hinged Door with Lockable Latch
Hose Reel Size	1" or 3/4" Hose Reel, 30 meters length
Mounting Type	Wall Mounted (Recessed / Surface / Semi-Recessed)
Finish	Red Powder Coated (RAL 3000)
Inlet Connection	25 mm or 19 mm Brass / Chrome Finish Landing Valve
Standard Compliance	BS EN 694 Fire hose, made by SFFECO, KSA
Color	Fire Red (RAL 3000), Polyester Powder Coated
Markings	Operation instructions printed on the door
Accessories	Nozzle, Landing Valve, Mounting Brackets (as required)

- ❖ Other material types are available upon request.
- ❖ Cabinets in stainless steel are available with hairline or mirror finish as per customer request.

MODEL	WIDTH (W)	HEIGHT (H)	DEPTH (D)
SF600	1050	800	230
SF600S	1050	800	230
SF600A	1050	800	250
SF600AS	1050	800	250

All dimensions are in mm.

Note: Fire blanket or Fire axe can be fitted in place of Extinguisher. **Extinguisher sold separately.**

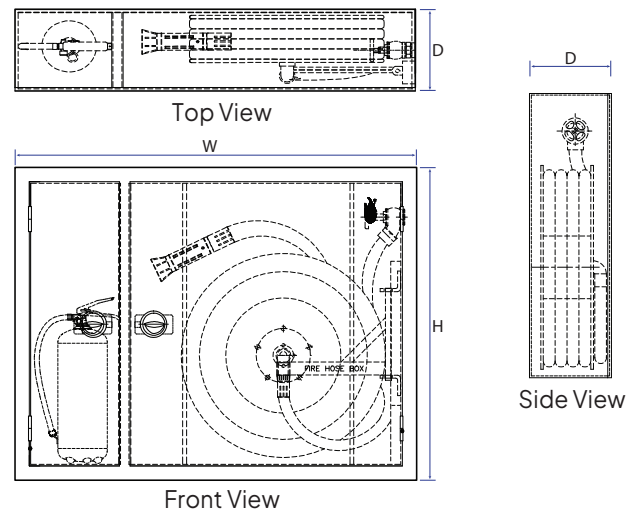

Fire Cabinets

Accessories



Semi Rigid Fire Hose (Kitemark Approved)

- ❖ Model : SH19R and SH25R
- ❖ Size : \varnothing 3/4" and 1" (\varnothing 19mm and \varnothing 25mm)
- ❖ Hose Length : 30 Mtr
- ❖ Work Pressure : 12 Bar
- ❖ Approval : BS EN-694:2014 Standard
- ❖ Hose Color : Red



Fire Hose Reel

- ❖ Model : SF 30 SA - 25 (Manual) / SF 30 A - SA - 25 (Automatic)
- ❖ Type (Standard) : Swinging Arm Type
- ❖ Type (Optional) : Fixed Type / Swinging Pipe Type
- ❖ Hose Length : 30 Mtr
- ❖ Approval : BS EN-671 / Sffeco Standard
- ❖ Swinging Angle : 180° (for Wall Mounted)
- ❖ Reel Diameter : 580mm
- ❖ Hose Color : Red (Other colors are available on request)
- ❖ Paint Finish : Electrostatic powder coat



Note: EN 671 Approved Hose Reels are provided with Plastic Nozzle and 1" Ball Valve & Nipple.

Nozzle



- ❖ Body: Brass & Chrome Plated
- ❖ 3 way control (Jet - Spray - Shut off)

Landing Valve



- ❖ Size 1" and 1.5": Brass body with chrome finish
- ❖ Size 2.5": Brass body
- ❖ Hand wheel made with steel and epoxy coated
- ❖ WP: 16 bar

Angle Valve



- ❖ Size 1.5": Brass body
- ❖ Hand wheel with steel epoxy coated
- ❖ UL/FM (Optional)

Plastic Nozzle



- ❖ 3 way control (Jet - Spray - Shut off)

Ball Valve & Nipple



- ❖ Size: 1"
- ❖ Body: Chrome plated

Pressure Restricting Angle Valve



- ❖ Size 1.5": Brass body
- ❖ Hand wheel with steel epoxy coated
- ❖ UL/FM (Optional)

EN 671 Approved Hose Reels are provided with

- * Plastic Nozzle (Model A) and 1" Ball Valve & Nipple.

Fire Cabinets

Design and Finish



Material and Finish

Full Stainless Steel Construction (Door, Frame & Backbox)

- ❖ Finish : Hairline / Mirror finish
- ❖ Thickness : 0.9mm / 1mm / 1.2mm / 1.5mm / 2mm

Full Mild Steel Construction (Door, Frame & Backbox)

- ❖ Finish : Red / as per customer request
- ❖ Thickness : 0.9mm / 1mm / 1.2mm / 1.5mm / 2mm

Backbox in Mild Steel

- ❖ Finish : Red / as per customer request
- ❖ Thickness : 0.9mm / 1mm / 1.2mm / 1.5mm / 2mm


Door and Frame in Stainless Steel

- ❖ Finish : Hairline / Mirror finish
- ❖ Thickness : 0.9mm / 1mm / 1.2mm / 1.5mm / 2mm


Trim

- Flat Trim cabinet
- Curved Trim cabinet


Mounting Type

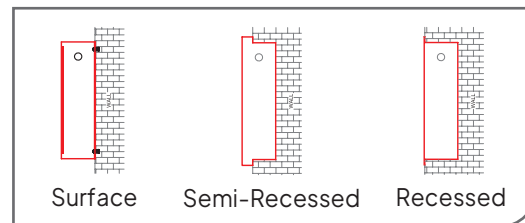


Door Opening Type

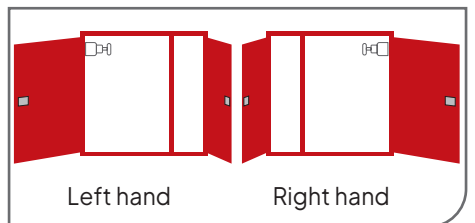

Door Selection

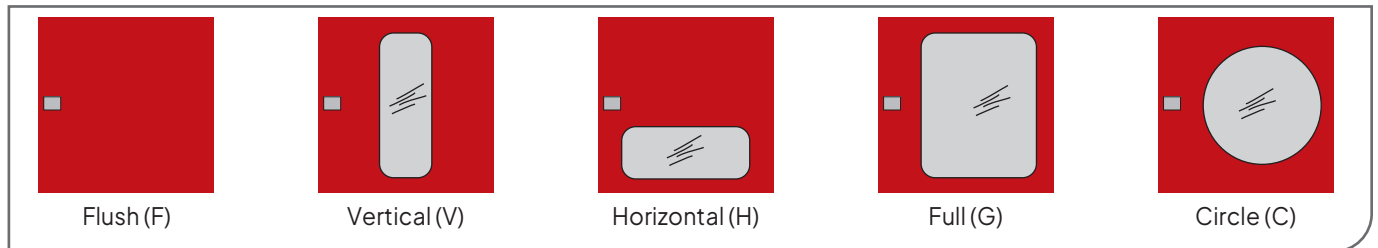

Glass Selection

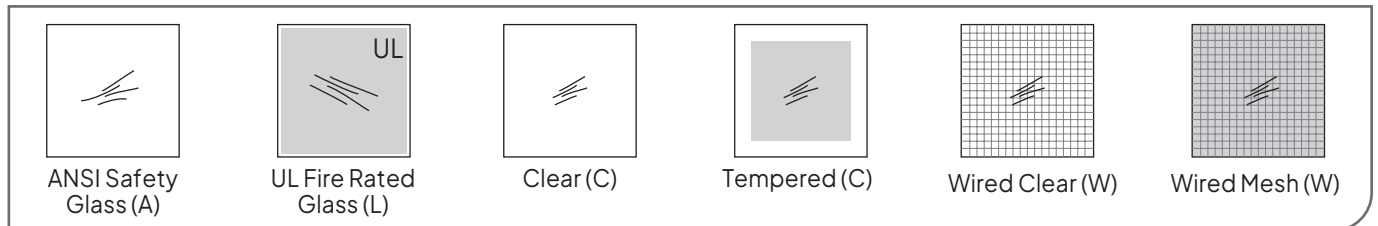

شركة المصنع السعودي لأجهزة الإطفاء SAUDI FACTORY FOR FIRE EQUIPMENT Co.

FACTORY & HEAD OFFICE - RIYADH

2nd Industrial Area, Al-Kharj Road, Riyadh, KSA, P.O. Box: 58469, Riyadh 11515
Tel : +966 11 2650070, E-mail: riyadh@sffeco.com.sa

JEDDAH BRANCH

P.O. Box: 16769, Jeddah – 21474, KSA
Tel : +966 12 670 6009,
E-mail: jeddah@sffeco.com.sa

DAMMAM BRANCH

P.O. Box: 7162, Dammam – 31462, KSA
Tel : +966 13 8351961,
E-mail: dammam@sffeco.com.sa

MADINAH BRANCH

Tel : 0148660959, 0148283256,
E-mail: madinah@sffeco.com.sa



WWW.
SFFECO.com