



شركة المصنع السعودي لأجهزة الإطفاء
SAUDI FACTORY FOR FIRE EQUIPMENT Co.

Empowering
a Safer Future for
the Kingdom



Fire Rated Doors and Frames



Fire Rated by Thomas Bell Wright – Saudi Arabia

Quality Approvals for Various Products and Services

VER: 00-12/25



The Global Standard in Fire Safety

Since 1983, SFFECO has been the trusted name and a recognized global leader in manufacturing top-tier fire-fighting equipment. We don't just offer products; we provide total fire safety solutions like fire doors, fire cabinets, fire pumps, fire extinguishing systems, etc. Our commitment to excellence is certified by multiple international standards, including ISO 9001 (Quality), ISO 14001 (Environmental), and ISO 45001 (Health & Safety). With state-of-the-art facilities in Riyadh and Dubai, we ensure every product meets rigorous international quality standards.

One-Stop-Shop for Fire Protection

SFFECO is your single source for everything in fire protection and fire-fighting. Represented in over 100 countries through a vast network of dealers, our innovative approach and comprehensive, end-to-end product range deliver the full spectrum of solutions you need. We're dedicated to keeping you safe and updated, constantly integrating the latest fire-fighting technology into our knowledge and services. Choose SFFECO and get certified quality, global reach, and pioneering innovation—all in one place.



Quality Services

SFFECO is deeply committed to ensuring superior performance and accuracy in every product it delivers. This dedication is maintained through continuous, close collaboration with a wide array of stakeholders, including key certification bodies, government regulatory agencies, industry partners, and leading technology associations. This concerted effort focuses on the development and delivery of truly innovative and high-quality fire-fighting solutions. The commitment to excellence is rigorously upheld through extensive product testing and evaluation, alongside a strict, ongoing process for continued product quality compliance, guaranteeing that SFFECO's equipment operates with assured reliability when it matters most.

SFFECO is dedicated to providing fire safety products of the highest quality and performance. We achieve this by working closely with certification bodies, government regulatory agencies, industry partners, and technology associations. This collaboration ensures our innovative products are backed by extensive product testing and evaluation, and maintained through continuous quality compliance. For instance, our fire doors are certified by Thomas Bell Wright to be fire-rated for up to 3 hours.

As global leaders since 1983, SFFECO believes in manufacturing quality products and offering exceptional service standards worldwide. Our primary goal is to reward our customers by keeping their investments safe and secure. Our manufacturing plant has steadily grown and is now equipped with modern hi-tech equipment and staffed by highly skilled professionals. With optimal ISO-certified operations, we consistently roll out products that match global standards to serve the needs of the growing fire safety market.



Empowering
a **Safer Future** for
the Kingdom



Fire Rated Doors and Frames Dimensions



**UPTO 3 HR
FIRE RATING**



Standard Size of Door Leaf:

Door Type	Door Width	Door Height	Door Depth
SF/SD - Single Door	900 mm	1950 mm	45 mm
SF/DD - Double Door	1900 mm	1950 mm	45 mm

Standard Size of Door including Frame:

Door Type	Frame Width	Frame Height	Frame Depth
SF/SD - Single Door	1000 mm	2000 mm	200 mm
SF/DD - Double Door	2000 mm	2000 mm	200 mm

Note: Tolerance: 5mm

Maximum possible size of fire rated Single Door as per TBW

- ❖ Maximum size of flush door leaf:
W: 1246mm, H: 2446mm, D: 45mm
- ❖ Maximum size of vision door:
W: 1084mm, H: 2127mm, D: 45mm
- ❖ Maximum size of door including frame:
(W: 1350mm, H: 2500mm, D: 300mm)

Maximum possible size of fire rated Double Door as per TBW

- ❖ Maximum size of flush door leaf:
W: 1201mm, H: 2132mm, D: 45mm
- ❖ Maximum size of vision door:
W: 1045mm, H: 2132mm, D: 45mm
- ❖ Maximum size of door including frame:
W: 2500mm, H: 2500mm, D: 300mm



General Specifications:

- ❖ SFFECO Fire doors are manufactured to comply with various architectural requirements.
- ❖ The precise finish and elegant appearance makes SFFECO's fire doors suitable for all applications.
- ❖ Doors can be used in dry wall and masonry construction.
- ❖ Standard door leaf thickness is 45mm
- ❖ Standard material thickness is 1.2mm for doors and 1.5mm for frames
- ❖ Doors are supplied factory primed as standard. Alternatively, they can be supplied powder painted as per customer request.
- ❖ Doors are available in different size and design to meet architectural requirements.
- ❖ Temperature Rise Rating: 180°C
- ❖ Fire Rating: upto 3 hour.

Technical Details:

Material	Specifications
Door material	Galvanized Steel
Frame material	Galvanized Steel
Insulation	Rock Whool
Color	Grey (Standard) / As per customer requirement

Note:

Fire doors and frames intended for installation in coastal or high-humidity environments are recommended to be fabricated from galvanized steel and finished with a special corrosion-resistant paint treatment to ensure long-term durability and performance.

Fire Rated Doors and Frames

Door Opening Type




**UPTO 3 HR
FIRE RATING**




Single Door

Double Door


Door Opening Type: LH (Left Hand)

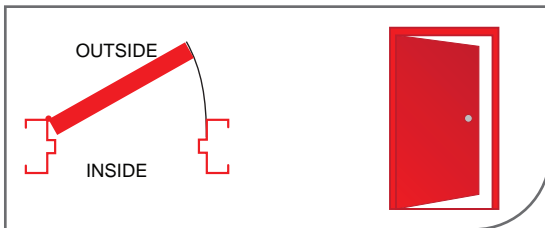


Door Opening Type: LHA (Left Hand Active)

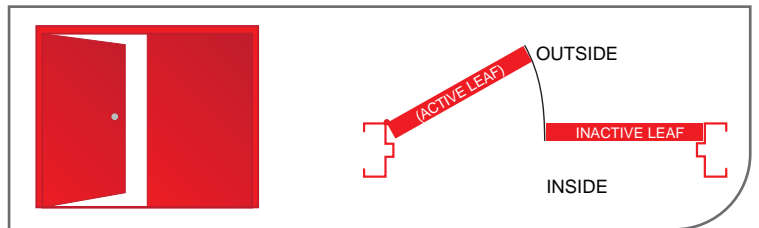


Door Opening Type: RH (Right Hand)

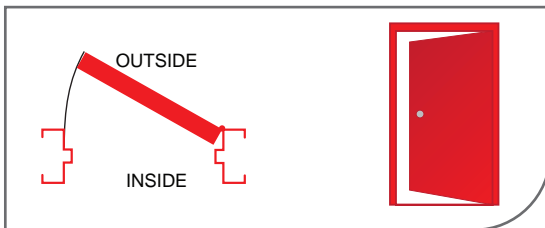


Door Opening Type: RHA (Right Hand Active)

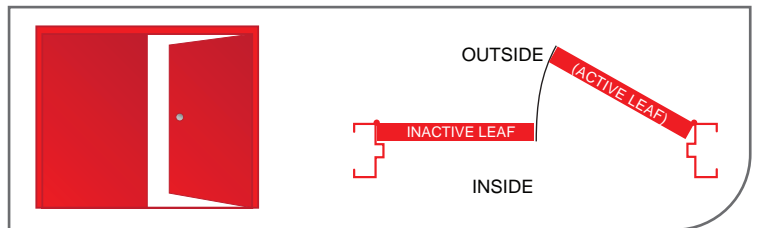


Door Opening Type: LHR (Left Hand Reverse)

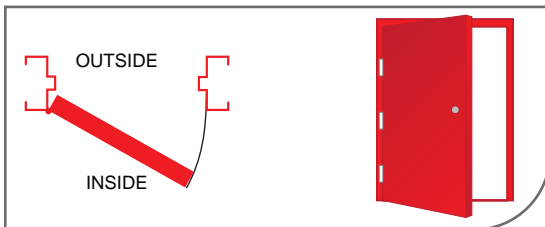


Door Opening Type: LHRA (Left Hand Reverse Active)

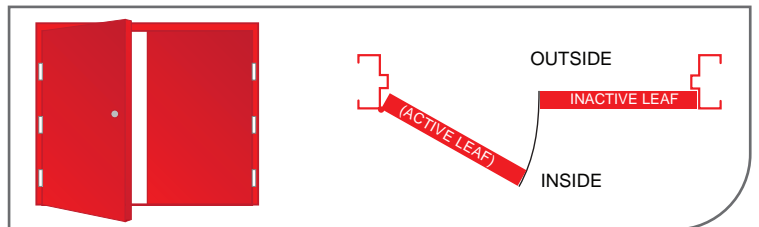

Door Opening Type: RHR (Right Hand Reverse)

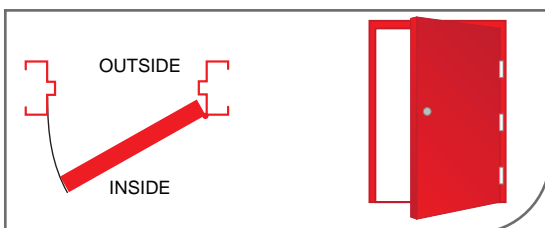


Door Opening Type: RHRA (Right Hand Reverse Active)

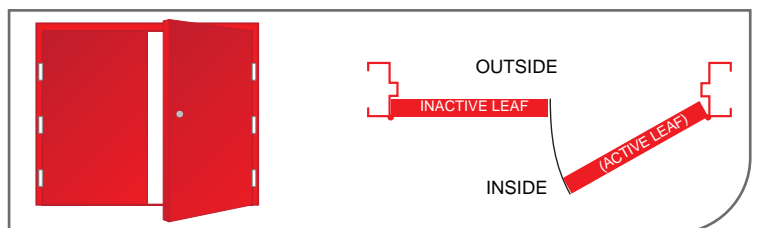

Fire Rated Doors and Frames

Exploded View

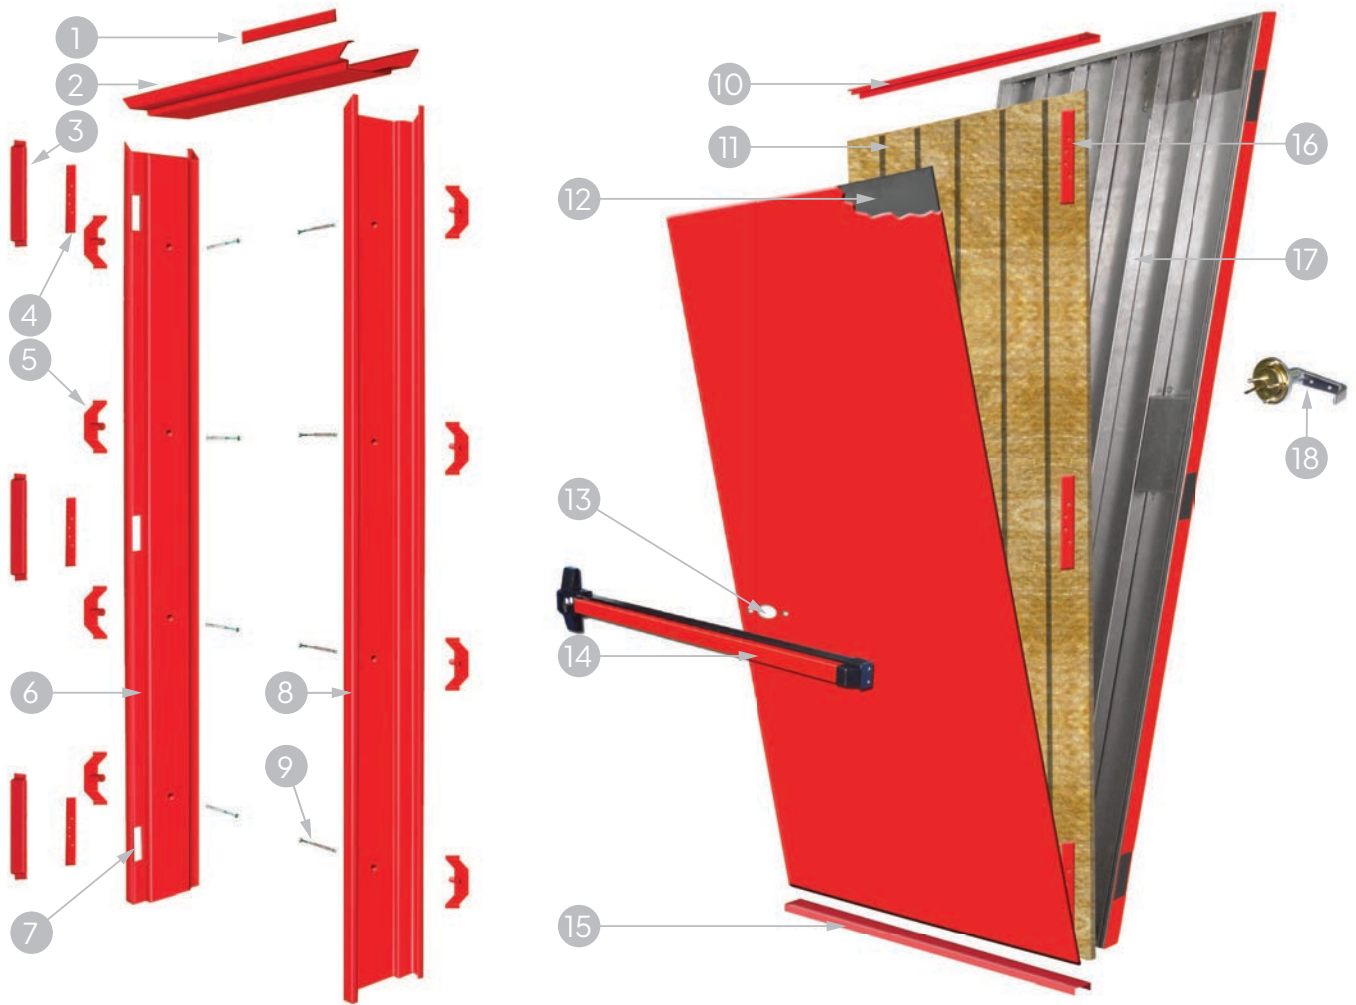

Door and Frame Accessories

- | | | | |
|------------------------------|------------------------------|-------------------------------|-------------------------|
| 1. Door closer reinforcement | 6. Hinge Jamb | 11. Insulation material | 15. Bottom Channel |
| 2. Head jamb | 7. Hinge cutout | 12. Door closer reinforcement | 16. Hinge reinforcement |
| 3. Mud box | 8. Strike Jamb | 13. Cut out | 17. Stiffener |
| 4. Hinge reinforcement | 9. Expansion BoltTop channel | 14. Exit device | 18. Outside handle |
| 5. Anchor | 10. Top Channel | | |

Fire Rated Doors and Frames

Standard Accessories



Rim Exit Device for
Single Doors



Model C
Outside Access Device



Hinges



Rim Exit Device for
Double Doors




Flush Bolt




Surface Mounted Door
Closer (Optional)

Frame Profile



Frame: Double Rabbet



Frame: Single Rabbet

Door Type



Flush Type



Vision Type

Vision Glass



UL Listed Vision Glass
Maximum size of Glass is
250 x 250mm

SFFECO has the expertise to manufacture a wide range of fire-rated doors and frames that meet specific customer requirements. We produce various architectural fire door designs to add elegance and aesthetic value to buildings. Our fire-rated doors have been thoroughly tested and approved by Thomas Bell-Wright.

These doors are specifically designed for areas where strength, stability, and durability are essential. They are typically used for entrances to industrial sites, service doors for shops, and access points for basements, stairs, and elevator shafts. They are also highly effective as dividing or exterior doors in demanding environments like electrical and petrochemical plants.



Since 1983, SFFECO has been a trusted name in fire protection, known for innovation and quality worldwide.

With state-of-the-art facilities in Riyadh and Dubai, we deliver a complete range of firefighting solutions that meet international standards.

Our innovative approach and comprehensive product portfolio make SFFECO the one-stop destination for reliable fire protection products and services.

شركة المصنع السعودي لأجهزة الإطفاء SAUDI FACTORY FOR FIRE EQUIPMENT Co.

FACTORY & HEAD OFFICE - RIYADH

2nd Industrial Area, Al-Kharj Road, Riyadh, KSA, P.O. Box: 58469, Riyadh 11515
Tel : +966 11 2650070, E-mail: riyadh@sffeco.com.sa

JEDDAH BRANCH

P.O. Box: 16769, Jeddah - 21474, KSA
Tel : +966 12 670 6009,
E-mail: jeddah@sffeco.com.sa

DAMMAM BRANCH

P.O. Box: 7162, Dammam - 31462, KSA
Tel : +966 13 8351961,
E-mail: dammam@sffeco.com.sa

MADINAH BRANCH

Tel : 0148660959, 0148283256,
E-mail: madinah@sffeco.com.sa

