

Connection Piece DN40 and DN50

Approvals



1) Listed system covered by UL-file EX15997 (SFFECO Prime FK, SFFECO Prime 227)

2) Part of the system approval

SAP designation

e.g. part no. 888052: Connection piece DN40

Maintenance

maintenance-free

Designation		Part no.	Weight kg (lbs)
Connection piece	DN40	888052	0.64 (1.44)
	DN40 NPT	914154	
	DN50	888053	1.26 (2.77)
	DN50 NPT	914155	

Technical data


External threadtapered, thread seal
Internal threadUN-nut thread, 74° conical hole
Working pressure60 bar (870 psi)
Materialsteel, galvanized coated

Application

Rigid connection between the valve of the extinguishing agent cylinder and the downstream piping and/or the manifold.

Dimension drawing

Dimensions in mm (inch)

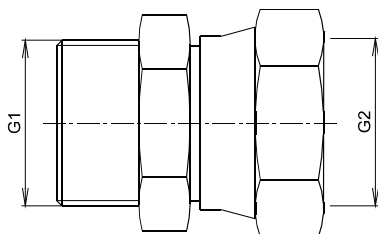

Connection piece	G1	G2
DN40	R 1.1/2"	1.7/8"-12 UN
DN40 NPT	1.1/2" - 11.5 NPT	
DN50	R 2"	2.1/2"-12 UN
DN50 NPT	2" - 11.5 NPT	