

## Clamp Extinguishing Agent Cylinder

### Approvals



1) Listed system covered by UL-file EX15997 (SFFECO Prime FK, SFFECO Prime 227)

2) Part of the system approval



### SAP designation

e.g. part no. 888014: Clamp ext. agent cylinder D=229mm

### Maintenance

maintenance-free

Clamp extinguishing agent cylinder	Part no.	Clamp for steel cylinder		Weight kg (lbs)
		drawn	welded	
D=229mm	888014	221 / 401 (ø229 mm / ø9")	-	1.26 (2.8)
D=254mm	923157	-	221 / 521 (ø254 mm / ø10")	1.39 (3.1)
D=267mm	887628	801 (ø267 mm / ø10.51")	-	1.46 (3.2)
D=316mm	887988	1001 (ø316 mm / ø12.44")	-	1.69 (3.7)
D=406mm	887639	801/1401/1801 (ø406 mm / ø16")	1061/1471/1801 (ø406 mm / ø16")	2.08 (4.6)

### Technical data


Material .....strip EN 10048 - 4,0 x 60  
 .....steel EN 10025-2-S235JR  
 Finish .....matt-finished or powder-coated  
 .....RAL 9011 graphite black

### Not included in delivery

Fastening material

### Dimension drawing

Dimensions in mm (inch)

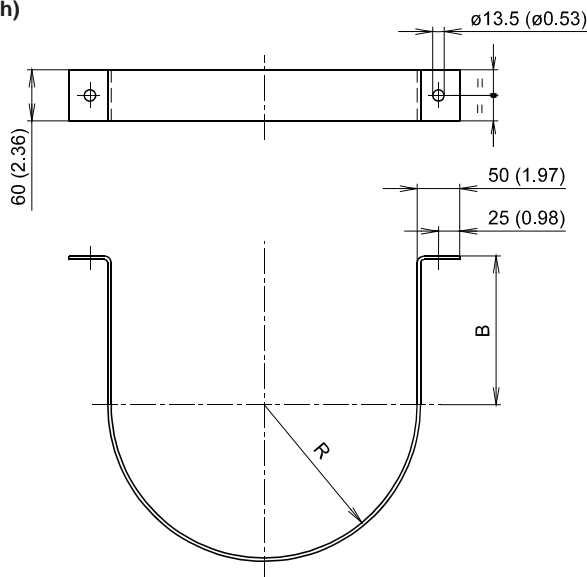

Clamp	R	B
D=229mm	117 (4.60)	111 (4.37)
D=254mm	129 (5.08)	124 (4.88)
D=267mm	136 (5.35)	130 (5.12)
D=316mm	160 (6.30)	155 (6.10)
D=406mm	205 (8.07)	200 (7.87)