


Extinguishing Agent Cylinder

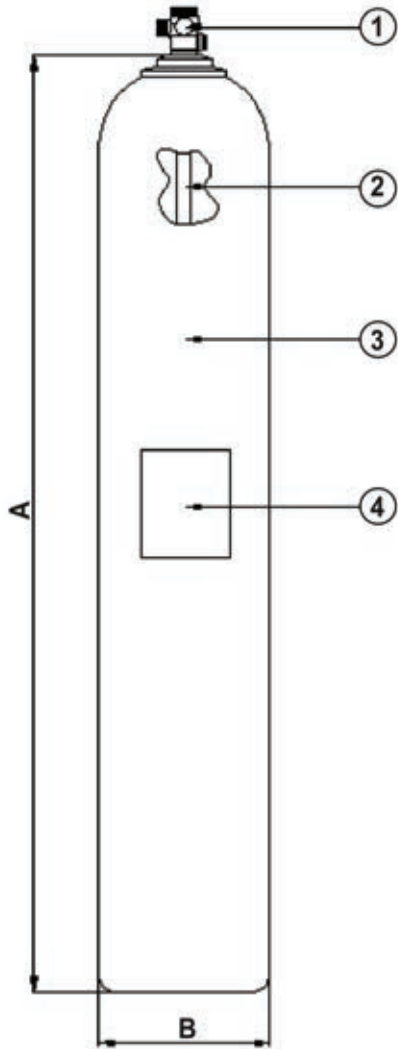

Size : A=1515mm, B= 266mm
Model : SFC-45
Capacity : 45 Kgs

Description

CO₂ cylinders are factory filled to capacity; partial fills are not allowed. The cylinders may be utilized in single or multiple cylinder applications as needed.

Carbondioxide cylinders must be floor mounted, with the discharge valve in the vertical (up) position. Horizontal mounting of cylinders is not allowed. The cylinders may be used in single or multiple cylinder applications as needed.

Cylinders are shipped from the factory with a protective shipping cap in place. Filled cylinders shall be secured during transport and while in storage in accordance with DOT and OSHA requirements. Upon installation, all cylinders shall be secured by cylinder straps or in a suitable racking arrangement. Once secured by a strap or cylinder rack, the safety/shipping cap is removed. The caps should then be stored in a suitable and nearby area for future use.

The high pressure seamless steel CO₂ cylinders has concave base and manufactured in accordance with 84/525 EEC.

Specification

Cylinder Material	Chrome Molybdenum Steel
Head Valve Material	Brass
Hydraulic Test Pressure	250 Bar
Finish	Primed and Painted in accordance with BS 4800:04E53
Discharge Valve Assembly	1" NPT
Simphon Tube	
Identification Label	

Important Note:

All CO₂ System to be provided with efficient detection system to assure that disachrg of gas to be in case of fire only.